


## 2" (50 mm) Quick-Release Cap Kit for Double-Wall Leak Sensor Installations

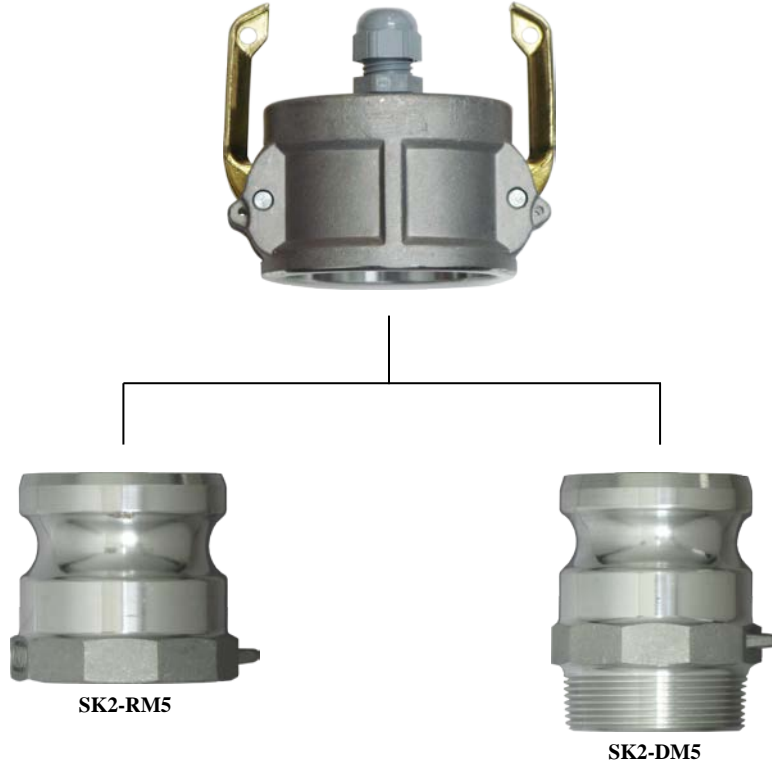

### Product Description

The SK2-RM5 Quick-Release Riser-Mount and SK2-DM5 Quick-Release Direct-Mount Cap Kits provide a convenient, easy-access method for secondary containment leak sensors installed in a tank annulus, or any other enclosed secondary containment installation. Both models include an aluminum cam-lock cap with integral watertight cable gland, and an additional cable gland for the field junction box. The SK2-RM5 includes a 2" aluminum ferrule having female threads to mount atop a 2" MNPT riser, whereas the SK2-DM5 includes an aluminum ferrule having male threads to mate with a 2" FNPT opening. Refer to the SK2-DM Series for chemical or harsh environment applications.

### Applications

- Tank Annulus
- Enclosed Piping Sumps

### Specifications

- Materials: Aluminum, Bronze, Buna-N Rubber and Nylon
- Mount: SK2-RM5: 2" FNPT for riser mount  
SK2-DM5: 2" MNPT for bung opening
- Operating Pressure: less than 5 PSIG (35 kPa)

### Model Numbers

- SK2-RM5 2" Aluminum/Bronze/Buna-N Rubber Cap w/Nylon Cable Compression Fitting, 2" FNPT Aluminum Ferrule
- SK2-DM5 2" Aluminum/Bronze/Buna-N Rubber Cap w/Nylon Cable Compression Fitting, 2" MNPT Aluminum Ferrule

70015 - SK2-RMx Spec Sheet - 11-20-2023  
Note: Specifications subject to change without notice.



Pneumercator Company, Inc.  
1785 Expressway Drive North  
Hauppauge, New York 11788

Tel: (631) 293-8450  
Fax: (631) 293-8533  
<http://www.pneumercator.com>