

# Hydrostatic Gauge

**"P" Series** Constant Air Continuous Reading Type




120 Finn Court, Farmingdale, NY. 11735  
(631)293-8450 Fax (631)293-8533 www.pneumercator.com

## Ordering Specifications

**Model:** P-5A, P-14A, P-29A      **Mounting Type:** Wall, Panel  
**Contents:** Corrosive, Non-Corrosive      **Tubing Length to Indicator:** \_\_\_\_\_  
**Dial Calibration:** Gallons, Liters, Feet & Inches, Other \_\_\_\_\_  
**Constant Air Switch:** Low \_\_\_\_\_, High \_\_\_\_\_  
**Air Flow Indicator:** \_\_\_\_\_ **Regulator Filter:** \_\_\_\_\_ **Alarm:** \_\_\_\_\_

### "REQUIRED TANK INFORMATION"

Manufacturer/Model No.:	
Type: Steel    Fiberglass	Horizontal    Vertical
Capacity (Actual):	Contents:
Inside Diameter:	Type of Ends:
Overall Length Outside:	Specific Gravity:

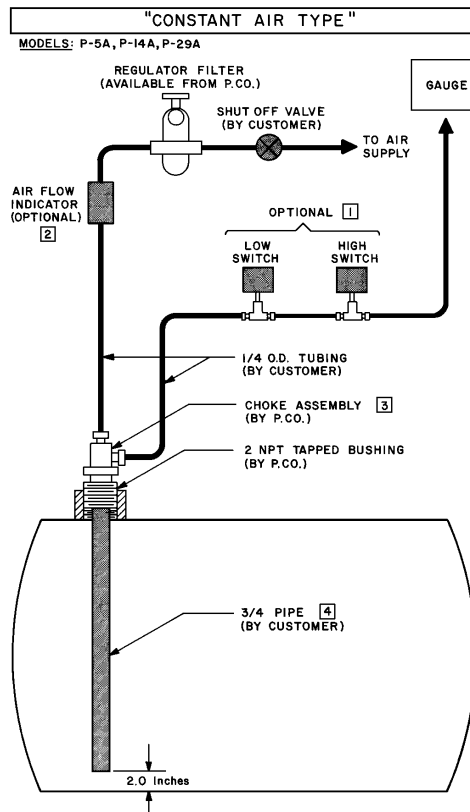

**Notes:**

- 1 - Switches are optional and will be factory set to operate at level specified by customer.
- 2 - Air flow indicator optional - provides visual indication of air flow through system.
- 3 - In routing lines, avoid (as much as possible) bends or dips that would act as moisture traps, where they cannot be avoided, it is suggested that condensate traps be installed.
- 4 - For corrosive liquids, use stainless steel or P.V.C. piping.  
 - All system components are supplied with fittings to accept 1/4" O.D. tubing.

