


# Wireless, 32 to 96 Tank Gauging System w/Color Touch Screen Suitable for Indoor and Outdoor Applications, Secondary Containment Leak Detection

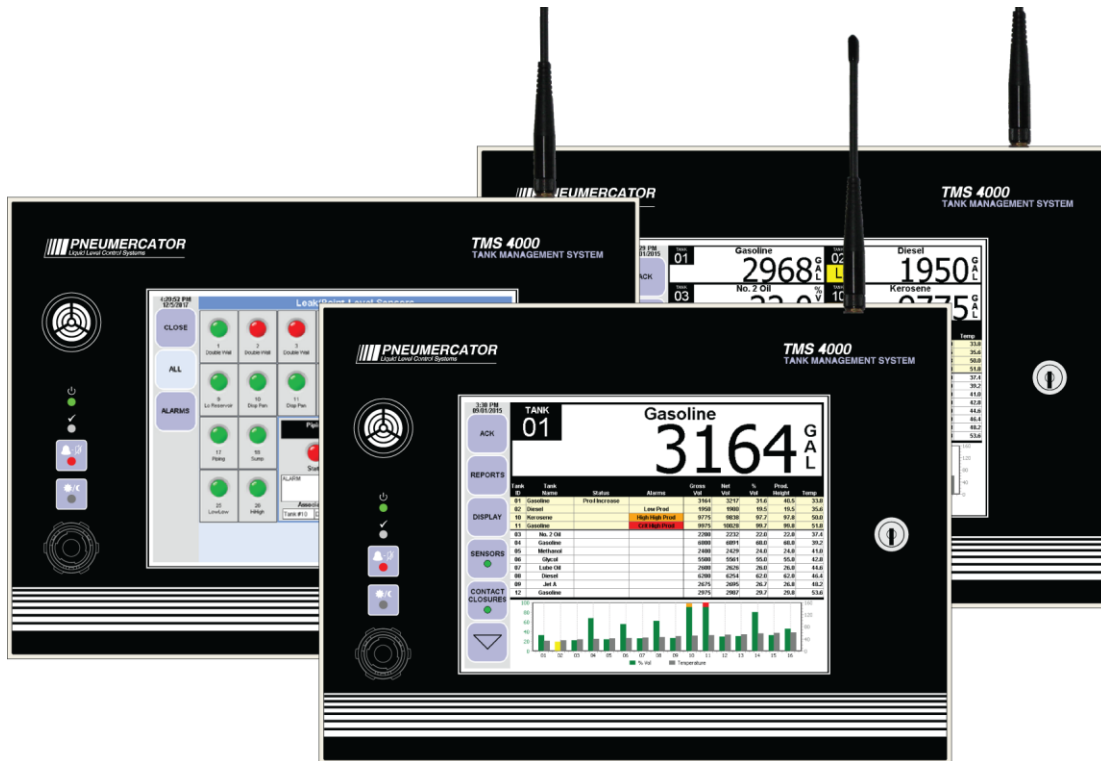

## Product Description

The TMS4000W Wireless Tank Management System is the latest generation of the TMS family, and the first touchscreen-based system in the industry available for both indoor and outdoor use without requiring a secondary enclosure, supplemental heating or cooling. The large, 10.4" color, SVGA display provides an extremely easy-to-use graphical interface with real-time tank measurement data presented in three distinct formats; easy-to-read meters, detailed spreadsheet and quick-view bar graphs. Each format is user-configurable, and the spreadsheet display prioritizes active or alarming tanks to the top of the window. Standard communications interfaces include Ethernet TCP/IP, USB host and client, RS232(2 standard, expandable to 6) and RS485. Single, dual or quad ModBus, 4-20ma and other industrial protocols are supported. Hardcopy reports are provided via optional internal thermal or impact printer in portrait and 116-character landscape modes, Ethernet-connected printer, or PDF to flash drive via front-panel weatherproof USB port. Extensive system security settings allow the administrator to assign users with widely varying degrees of accessibility. Localization features include operation in English, Spanish or French, with Metric(LT/mm) or English(Gal/in) units of measure, and an auto-switching universal power supply that will operate with any line voltage between 95-250VAC, 50/60Hz.

## Console

- Dimensions (W x H x D): 14.3" x 11.8" x 7.9" (363 mm x 300 mm x 200 mm)  
Enclosure-Mounted Antenna adds an additional height of 5" (127 mm)
- Weight: 21 lb (9.6 kg) (4-Tank w/ Printer), 23.5 lb (10.7 kg) (12-Tank w/ Printer)
- Operating Temperature: -22 °F to 160 °F (-30 °C to 70 °C) w/o Printer (Consult factory for applications below -22 °F)  
-5 °F to 140 °F (-20 °C to 60 °C) w/ Printer
- Humidity: 95% Non-condensing
- Enclosure Rating: Locking NEMA 12 (IP52) or NEMA 4X (IP56) (304 SS)
- Power Requirements: 115/230 VAC ±15% Autoswitching, 50-60 Hz, 30 W Max.  
8-16 VDC or 16-60 VDC Optional
- Memory: Configuration/Setup Data – SD Card, 50 year data retention, no batteries  
Log Reports – Removable SD Card, 50 year data retention, no batteries  
Real-Time Clock – Lithium Battery-Backed
- Audible Alarm: 85 db
- Display: 10.4" (264 mm) Diagonal SVGA LCD w/Integral Touch Panel – Glove Touchable  
Dedicated Ultra-High Intensity POWER, NORMAL, ALARM LEDs, Visible from 75' (22.9 m)
- WiDAM Communications: 902-928 MHz FHSS, 2.4 GHz FHSS optional

- **Data Communications:** Two (2) RS-232 Included Standard, RJ-13 Jack, Optional Expansion to six (6)  
RS-485 Included Standard, RJ-13 Jack (For Pneumercator Peripherals)  
Ethernet TCP/IP Port Included Standard  
USB Host and Client Included Standard  
Internal, Secured Modem, Fax / Modem or Single/Multi-Channel ModBus Optional
- **Probe / Sensor Capacities:** 32 to 96 Magnetostrictive Probes  
128 to 384 Leak/Point-Level Sensors
- **I/O, Non-Haz.:** Expansion Options (2 slots available):  
4 Relays, 1 Form C, Rated 10 A@120 VAC, 6 A@240 VAC, w/ 4 Opto-Isolated Inputs  
8 Relays, 1 Form A, Rated 5 A@120 VAC, 5 A@240 VAC, w/ 8 Opto-Isolated Inputs  
16 Relays, 1 Form A, Rated 5 A@120 VAC, 5 A@240 VAC  
6 or 12-Ch. Programmable Analog Outputs:  
0-1 mA, 0-20 mA, 0-24 mA, 4-20 mA, 0-5 VDC, 1-5 VDC

**Probe**

---

- **Technology:** Magnetostrictive, Dual Float, w/ reflection resolution doubling
- **Accuracy (Minimum):**

MP55xS:	MP56x:
Product Level: 0.01" (0.254 mm)	Product Level: 0.01" (0.254 mm)
Water Level: 0.01" (0.254 mm)	Water Level: 0.01" (0.254 mm)
Temperature: 0.1 °F (0.06 °C)	Temperature: 0.1 °F (0.06 °C)
- **Materials:** Shaft: 316 SS or PVDF  
Floats: 316 SS, Buna-N, Urethane, or PVDF
- **Mounting:** 2" (51 mm) minimum riser or direct bushing / flange mount
- **Temperature Sensing:** 5 Thermistors in shaft, 1 in probe head
- **Location Approval:** UL Class I, Div 1, Groups C and D; cUL Class I, Zone 0, Group IIB
- **Operating Temperature:** -40 °F to 175 °F (-40 °C to 80 °C)
- **Operating Pressure:** 150 PSIG (1034 kPa) 316SS, 50 PSIG (345 kPa) PVDF
- **Field Wiring:** 22AWG, 3-Conductor w/ shield  
Belden 6501FE or equiv., maximum length 50' (15.2 m)
- **Models:** MP55xS Series rigid SS max. length 24' (7.3 m)  
MP56xS Series flex. PVDF max. length 70' (21.3 m)

**Sensors**

---

- **ES825-400FL** Electronic, Discriminating - Containment, Manway and Piping Sumps, Dispenser Pan, Dry Annular, Includes Fault Detection Feature as Standard
- **ES825-300FL** Electronic, Non-Discriminating - Containment, Manway and Piping Sumps, Dispenser Pan, Dry Annular, Includes Fault Detection Feature as Standard
- **LS600LD** Float, Containment, Manway and Piping Sumps, Dispenser Pan
- **LS600xx** Multi-Float, High / Low Level and Pump Control
- **RSU800** Float, Wet Annular / Reservoir
- **LS610** Float, Dry Annular
- **HS100NDL** Polymer – Dry Containment, 1' to 6' (0.3 m to 1.8 m) length

Most sensors are available with Fault-Detect Supervised sensor and wiring option. Add "FL" Suffix to Model Number

**Remote Displays**

---

- **ETD1000** Addressable (up to 16), Multi-Drop, Remote Electronic Tank Display Panel
- **RA400** Addressable (up to 16), Multi-Drop, Programmable Remote Audible/Visual Alarm Panel
- **ETD1000W** Wireless Remote Electronic Tank Display Panel\*
- **RA400W** Wireless Programmable Remote Audible/Visual Alarm Panel\*

\*Note: MPX200 Master Peripheral Expansion Module required.

**Certifications / Approvals**

---

- UL/cUL Approved, File #E139464

Note: Specifications subject to change without notice. 01-19-2018



Pneumercator Company, Inc.  
1785 Expressway Drive North  
Hauppauge, New York 11788

Tel: 631-293-8450  
Fax: 631-293-8533  
<http://www.pneumercator.com>