

Hydrostatic Gauge

"P" Series Constant Air Continuous Reading Type



1785 Expressway Drive North, Hauppauge, NY 11788
(631)293-8450 Fax (631)293-8533 www.pneumercator.com

Ordering Specifications

Model: P-5A, P-14A

Mounting Type: Wall, Panel

Contents: Corrosive, Non-Corrosive

Tubing Length to Indicator: _____

Dial Calibration: Gallons, Liters, Feet & Inches, Other _____

Regulator Filter: _____

"REQUIRED TANK INFORMATION"

Manufacturer/Model No.:

Type: Steel Fiberglass

Horizontal Vertical

Capacity (Actual):


Contents:

Inside Diameter:

Type of Ends:

Overall Length Outside:

Specific Gravity:

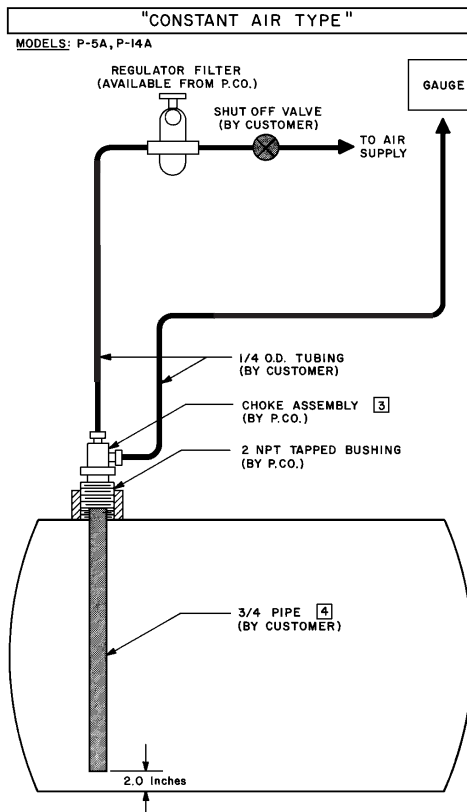

Notes:

- 1 - Switches are optional and will be factory set to operate at level specified by customer.
- 2 - Air flow indicator optional - provides visual indication of air flow through system.
- 3 - In routing lines, avoid (as much as possible) bends or dips that would act as moisture traps, where they cannot be avoided, it is suggested that condensate traps be installed.
- 4 - For corrosive liquids, use stainless steel or P.V.C. piping.
 - All system components are supplied with fittings to accept 1/4" O.D. tubing.

