

LS600F4 WORKSHEET

(Use This Worksheet to Generate Custom Configurations)

Select ONE of EACH option below:
(Factory default shown in bold,
consult factory for Other options)

Float
Stainless Steel Only

Stem
Stainless Steel Only

Wiring Termination (Optional)

Housing
 Quick Disconnect
 Flex Conduit Fitting


Special Features (Optional)

Adjustable
(Bushing/Flange Only)
 Test Lever
 Riser Spacer Mount

Mounting

None
 4" MS Bushing
 4" S/S Bushing
 4" S/S 150# Flange
 Other Bushing

 Other Flange

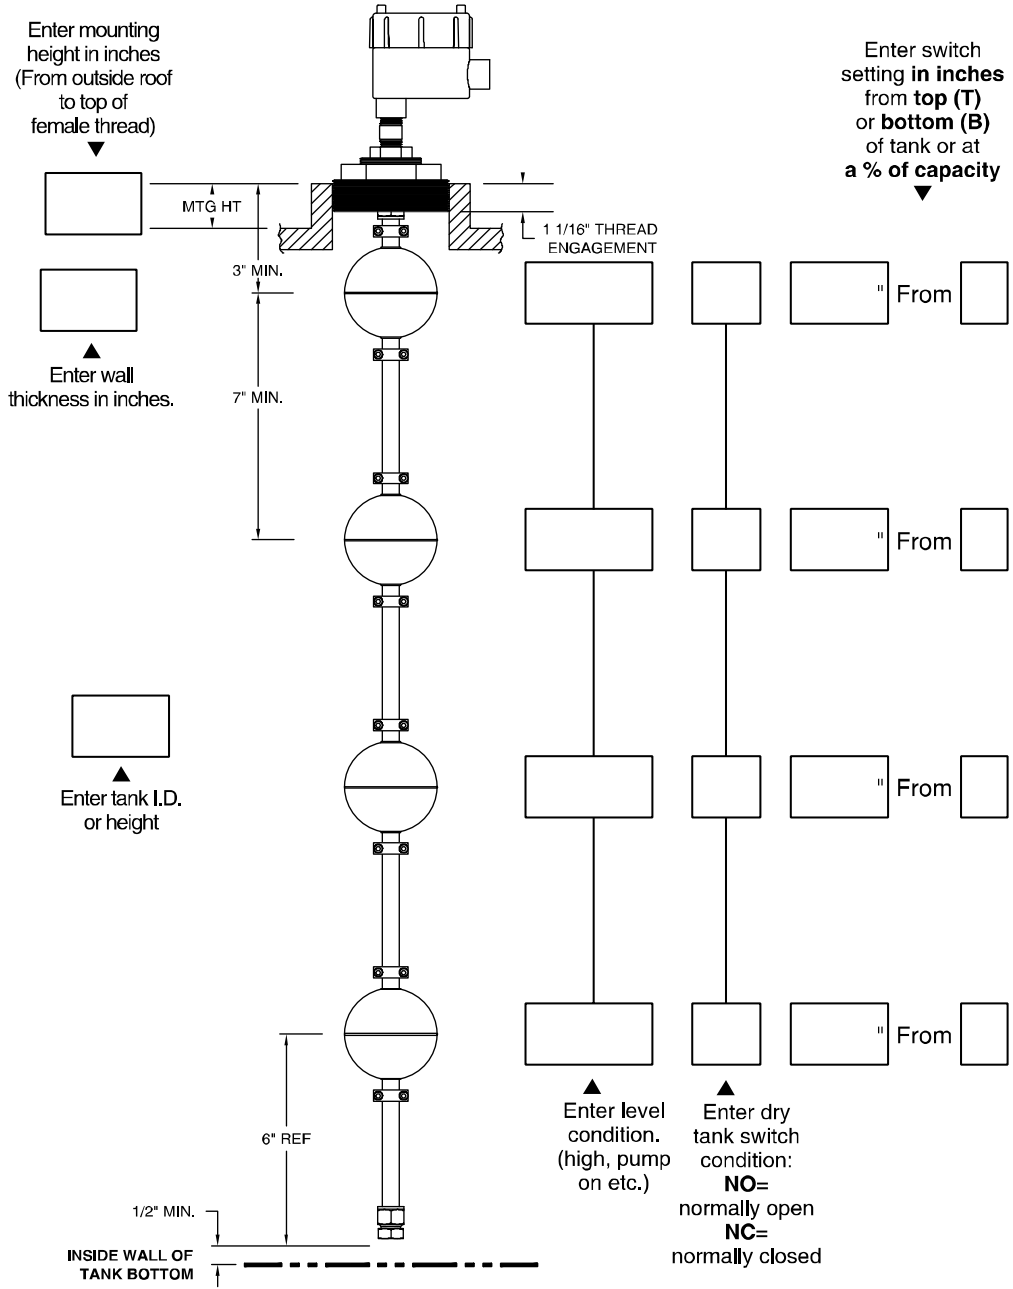

Enter switch setting in inches from **top (T)** or **bottom (B)** of tank or at a % of capacity

Additional Tank Information: (Required where setting is given as a percent of volume)

Actual Capacity: _____

End Type (Horizontal cylinders only) (Flat, Dished, Spherical, etc.): _____

Manufacturer: _____