

# LS600W WORKSHEET

(Use This Worksheet to Generate Custom Configurations)

Select ONE of EACH option below:  
(Factory default shown in bold,  
consult factory for Other options)


**Float**  
**Stainless Steel Only**

**Stem**  
 Brass  
 Stainless Steel

**Wiring Termination (Optional)**  
 Housing  
 Quick Disconnect  
 Flex Conduit Fitting

**Special Features (Optional)**  
 Test Lever  
 Riser Spacer Mount  
 Adjustable  
(Bushing/Flange Mount Only)

**Mounting**  
 None  
 **2" MS Bushing**  
 2" S/S Bushing  
 2" Aluminum Quick Release Cap  
 2" S/S 150# Flange  
 4" S/S 150# Flange  
 Other Bushing  
\_\_\_\_\_  
 Other Flange  
\_\_\_\_\_

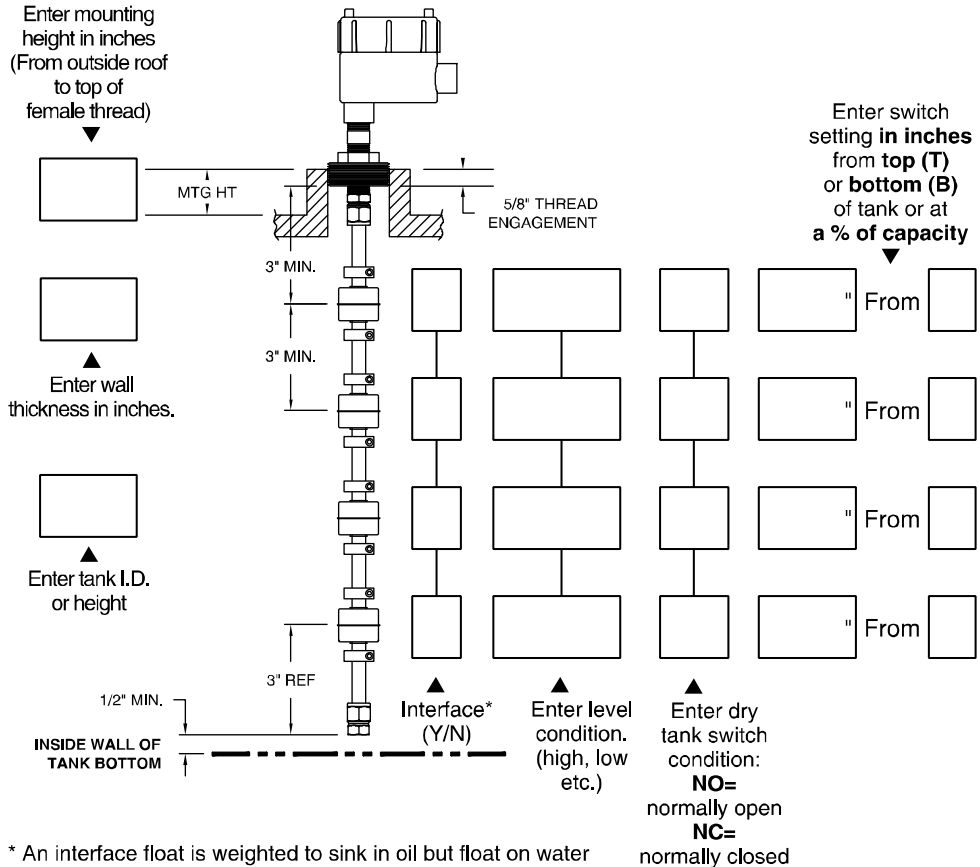

\* An interface float is weighted to sink in oil but float on water

**NOTE**

Unless otherwise specified, the contact state in a dry tank is set as follows:

All Interface Floats: Normally Closed

Non-Interface Floats:

Overfill, H. High, and High: Normally Open

L. Low and Low: Normally Closed

Additional Tank Information: (Required where setting is given as a percent of volume)  
Actual Capacity: \_\_\_\_\_  
End Type (Horizontal cylinders only) (Flat, Dished, Spherical, etc.): \_\_\_\_\_  
Manufacturer: \_\_\_\_\_